
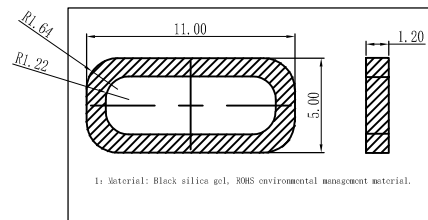








THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO Y-S ELECTRONIC, ANY REPRODUCTION IN PART OR WHOLE WITHOUT PRIOR WRITTEN APPROVAL OR AUTHORIZATION OF Y-S ELECTRONIC IS STRICTLY PROHIBITED.

RoHS COMPLIANT

REV.	DESCRIPTION	ECN NO.	DWN.	CHK.	APVD.	DATE
A			Xie		Zhou	2023-06-25

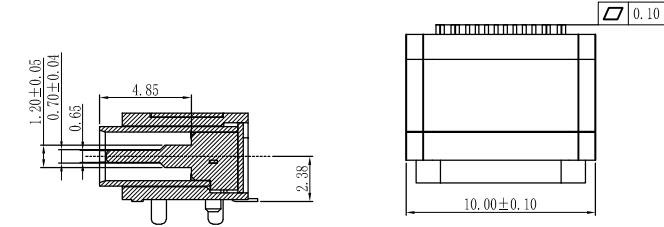

Rubber ring size



- NOTES:  
SPECIFICATION:
- CURRENT RATING: 5A MAX
  - VOLTAGE: 100 VAC
  - TEMPERATURE RANGE: -40 °C ~ 85 °C
  - CONTACT RESISTANCE: 40 MILLIONHM MAX
  - INSULATION RESISTANCE: 100 MEGOHMS MIN.
  - INSERTION FORCE : 5N~20N
  - UNMATING FORCE: 8N~20N
  - DURABILITY: 10,000 CYCLES
  - Water Resistance: IPX7

Ordering Information

184j -  $\frac{XX}{a}$   $\frac{X}{b}$   $\frac{X}{c}$   $\frac{X}{d}$   $\frac{X}{e}$   $\frac{X}{f}$

- a. No. Of Pins  
16: 16 positions
- b. Contact Type  
Q: Female IPX7 ( The head of the four-jaw iron shell is exposed 1.20MM L=7.85mm)
- c. Contact Plating  
0: Gold flash selective gold
- d. Shell Type  
1: Nickel
- e. Insulator Color  
1: Black (LCP)
- f. Contact Type(Signal Pin)  
N: SMD Type

DO NOT SCALE DRAWING

DIMENSIONS: <input type="checkbox"/> mm [INCH] <input type="checkbox"/> INCH [mm] <input checked="" type="checkbox"/> mm ONLY		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE DRAWN BY AND DATE Xie 2017-12-15			
UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCE: DECIMALS    ANGLES X. ±0.38      X* ±3° .X ±0.25      .X* ±1.0° .XX ±0.15		CHECKED BY AND DATE Fan 2017-12-15 APPROVED BY AND DATE Zhou 2017-12-15 THIRD ANGLE PROJECTION 			
MATERIAL:		SCALE: 1 : 1    SIZE: A3		DRAWING NO. 184J-16Q011N	
FINISH:				FILE NO.:    SHEET 1 OF 1	

REV

A