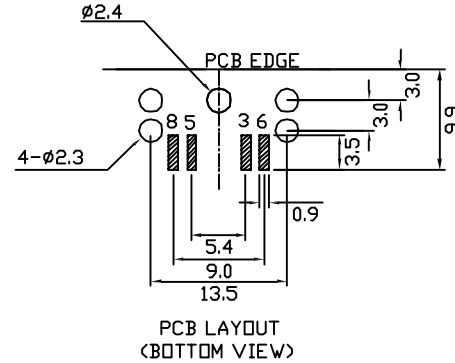
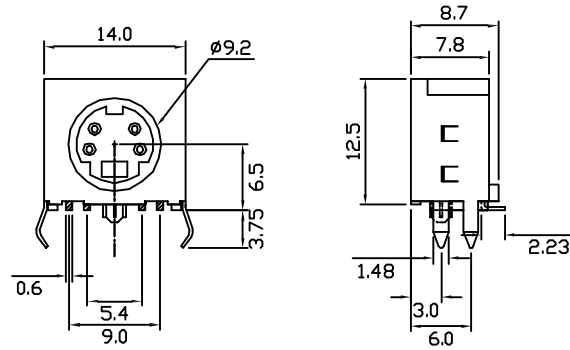



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO Y-S ELECTRONIC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT PRIOR WRITTEN APPROVAL OR AUTHORIZATION OF Y-S ELECTRONIC IS STRICTLY PROHIBITED.

RoHS COMPLIANT

REVISIONS				
REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE





- Note:
- Material:
    - Insulator: NYLON PA9T P.B.T UL 94-V0 rated.
    - Contact: phos.bonze,t=0.20mm.
    - Shell: Copper alloy,t=0.30mm.
  - Specification:
    - Current rating: 1 A Max.
    - Dielectric withstanding voltage: 500 V(ac) for 1 minute.
    - Contact resistance: 30 mW Max.
    - Insulation resistance: 1000 MW Min at DC 500V.
    - Total mating force: 3.0 KgF Max.
    - Total unmating force: 0.5 KgF Min.
    - Temperature range: -55°C~+105°C

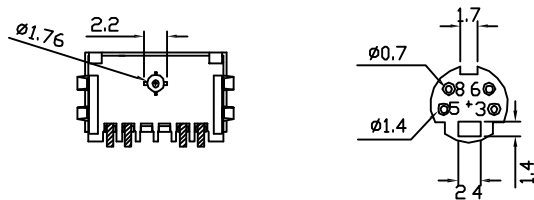

Y-S Standard P/N:189d-422222



DO NOT SCALE DRAWING

DIMENSIONS: <input type="checkbox"/> MM [INCH] <input type="checkbox"/> INCH [mm] <input checked="" type="checkbox"/> MM ONLY	CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE		 <b>Y-S ELECTRONIC CO., LTD.</b> No. 101, Sec. 1, Long-An Street, Lu-Chu, Taoyuan, Taiwan, R.O.C. TEL: +886-3-3609819 FAX: +886-3-3609817
	UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCE: DECIMALS      ANGLES X: ±0.38 [0.015]    X°: ±3° .X: ±0.25 [0.010]    .X°: ±1.0° .XX: ±0.13 [0.005]	DRAWN BY AND DATE JUSTIN XING 06-29-06	
MATERIAL: _____ FINISH: _____	APPROVED BY AND DATE MICHAEL HAUNG 06-29-06	THIRD ANGLE PROJECTION 	DRAWING NO. 189d-422222      REV A
SCALE: 2 : 1      SIZE: A3	FILE NO.: _____		SHEET 1 OF 2


THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO Y-S ELECTRONIC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT PRIOR WRITTEN APPROVAL OR AUTHORIZATION OF Y-S ELECTRONIC IS STRICTLY PROHIBITED.

RoHS COMPLIANT

REVISIONS				
REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE

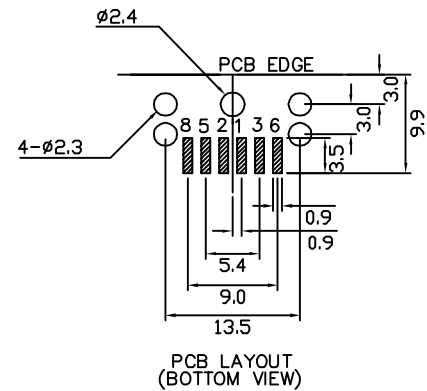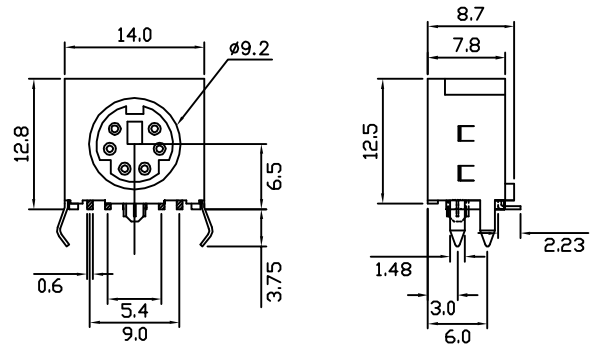

- Note:
- Material:
    - Insulator: NYLON PA9T P.B.T UL 94-V0 rated.
    - Contact: phos.bonze,t=0.20mm.
    - Shell: Copper alloy,t=0.30mm.
  - Specification:
    - Current rating: 1 A Max.
    - Dielectric withstanding voltage: 500 V(ac) for 1 minute.
    - Contact resistance: 30 mW Max.
    - Insulation resistance: 1000 MW Min at DC 500V.
    - Total mating force: 3.0 KgF Max.
    - Total unmating force: 0.5 KgF Min.
    - Temperature range: -55°C~+105°C

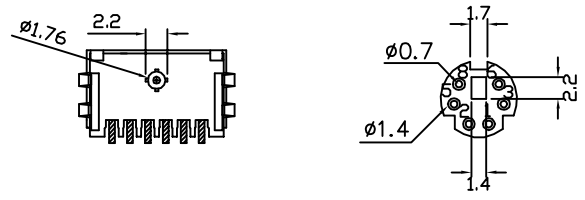

Y-S Standard P/N:189d-622222

DO NOT SCALE DRAWING

DIMENSIONS: <input type="checkbox"/> MM [INCH] <input type="checkbox"/> INCH [mm] <input checked="" type="checkbox"/> MM ONLY	CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	Y-S ELECTRONIC CO., LTD. No. 101, Sec. 1, Long-An Street, Lu-Chu, Taoyuan, Taiwan, R.O.C. TEL: +886-3-3609819 FAX: +886-3-3609817	
	UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCE: DECIMALS      ANGLES .X ±0.38 [0.015]    X° ±3° .X ±0.25 [0.010]    .X° ±1.0° .XX ±0.13 [0.005]		DRAWN BY AND DATE JUSTIN XING 06-29-06
MATERIAL: _____ FINISH: _____	CHECKED BY AND DATE JUSTIN XING 06-29-06  APPROVED BY AND DATE MICHAEL HAUNG 06-29-06 THIRD ANGLE PROJECTION	DRAWING NO. 189d-622222	REV A
SCALE: 2 : 1	SIZE: A3	FILE NO.: _____	SHEET 2 OF 2